









Assembly instruction

PAWHUT
Item No: D51-069

- S1**  25mm 8pcs
S2  20 mm 24pcs
S3  10mm 16pcs
S4  8mm 4pcs
S5  4pcs
S6  4pcs

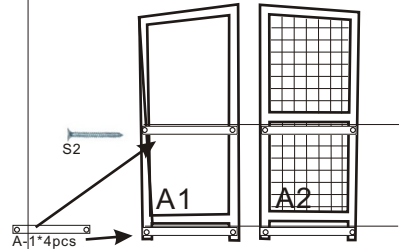


A= cage side wall




B= cage back wall


- 1** S2*8pcs
A1/A2*1pc; B*2pcs




- 2** S1*8pcs
G*2pc

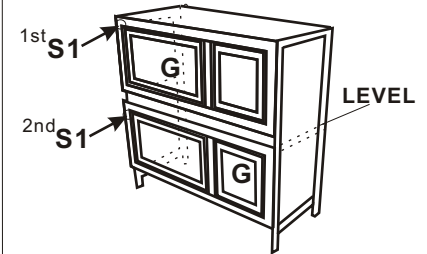


Screw detail



C= cage front frame




D= samll door





E= cage rainproof roof&roof top

- 3** F*2pcs




- 4** S4*4pcs
E*1pc



F= rainproof drawer

- S2*2pcs; S3*8pcs; S6*2pcs
C/D1/D2



G*2pcs

G= finished cage front frame

SOFTLY REMIND

Make sure screws are accurately inserted. Avoid the points of nails sticking into the living space of your pet; they could cause injury.

SOFTLY REMIND

- Fir&plywoode sections may twist when unassembled, if you happen to meet this problem do two steps as follow:
- 1.find out which surface is curved.
 - 2.put the curved face down-ward the floor for a shart time under the sunshine (if no sunshine,thime should meed little more).
 - 3.then you can find the fir&plywoode revert to level.

thank you